

Primary for Porous Materials for High Traffic Floors
 Once Applied, Optimize the Performance of the Final Coating and Save Money

Street Primer

Contains 35% of pure Nano Acryl HT

Ready to be applied - Any kind of dilution will void the warranty

Warranty	1 year
Yield per Liter	4.0 – 8.0 m ²
Adhesion Strength	more than 420 tons x m ²
Contact Temperature	-25° C / +110° C

Street Primer is an acrylic primer for porous construction materials.

It's made from our green 100% acrylic, nano-pollution free nano-resin Nano Acryl HT.

Street Primer can be applied on any kind of porous materials, having an exceptional strength of adhesion and will last for more than 1 year.

It's washable with common household detergents and chlorine and is Anti-fungi, Anti-algae.

Street Primer seals any pore and does not permit penetration of water or moisture into protected construction material.

Street Primer can be pigmented to support the color of the final coating Street Marker


Street Primer resists :

Extreme Weather – Salinity and Humidity of Marine Environment
 Pollution - Animal Waste - Bird Drops - Permanent Puddles - Inorganic acids

All Nasacoat Coatings are 100% Acrylic - 100% Water Based
 Non toxic - 100% Ecological = Environmental Friendly and Sustainable
 as well as

100% Free of cheap monomers : Styrene, Vinyl and VEOVA
 100% free of poisoning : Ammonia, Lead, Heavy Metals, Organic Vapors Emission = 0 VOC

Sustainable Materials for a Better and Healthy Future

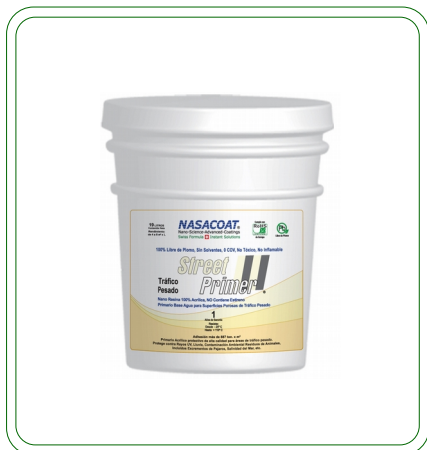

Primary for Porous Materials for High Traffic Floors
 Once Applied, Optimize the Performance of the Final Coating and Save Money



Contains 35% of pure Nano Acryl HT

Ready to be applied - Any kind of dilution will void the warranty

Technical Characteristics

Yield per Liter (m ²)	4.0 – 8.0	Flexibility	180°
Content of Nano Acryl HT	35%	Adhesion Strength	> 4 MPa
VOC	< 5 g / L - 0 VOC	Adhesion Strength x m ²	> 420 Tons
Density	1.19 g / ml	Temperature Resistance	- 25° / + 110°
Solids	27%	Touch Dry	1 hour.
Viscosity	950 – 1,300 cps	Total Drying	2 hours
pH	8.0 - 9.5	Total Curing time	36 hours
Maximum Storing Time	12 months	Warranty	1 year
Maximum Storage Temperature	35°	Available in containers of	1, 4, 19 and 200 Liters

Street Primer can be easily applied with common brushes, rollers or, as best solution, with airless machine. It does not need any dilution, it's ready to apply.

Street Primer is applied with 1 coat only. If applied on an extremely porous surface, like some kind of asphalt, concrete or similar, may require the application of a second coat.

See the Application Manual at : www.nasacoat.com/en/application_manual.pdf

Exclusive Distributor in Mexico :

Nasacoat de México SA de CV Av. López Mateos # 2077 - Plaza del Ángel - Local 9 - Nivel 1,
 Jardines de Plaza del Sol - 44510 Guadalajara, Jalisco - Mexico

Phone : +52 33 3696 10 51 email : team@nasacoat.com www.nasacoat.com